


ReelPro 200 · 27,000 mAh 200 W Power Bank

RC-PB200WB

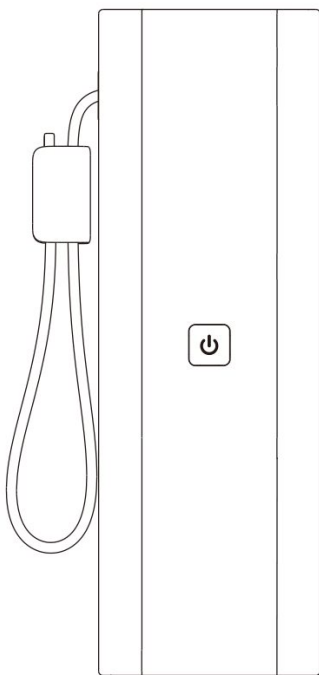

User Manual

Thank you for choosing ReelCharge. Please read this manual before using your product to ensure safe and optimal performance. Keep this guide for future reference.

1. Product Specifications

Product

ReelPro 200 · 27,000 mAh 200 W Power Bank

Model

RC-PB200WB

Battery type

Lithium-polymer

Battery capacity

27,000 mAh

USB-C input

5 V = 3 A / 9 V = 3 A / 12 V = 3 A / 15 V = 3 A / 20 V = 5 A

2. What's in the Box

- ReelPro 200 · 27,000 mAh 200 W Power Bank (RC-PB200WB)
- Charging cable
- User Manual

Output Specifications

Built-in USB-C cable output

140 W (max)

USB-C1 output

140 W (max)

USB-C2 output

100 W (max)

USB-A output

5 V = 3 A / 9 V = 2 A / 12 V = 1.5 A


Maximum total power

200 W

3. Product Overview

- Built-in USB-C cable (fast charging)
- USB-C input/output ports
- USB-A port
- TFT display
- Display activation button
- Compact and portable design

3. Product Overview

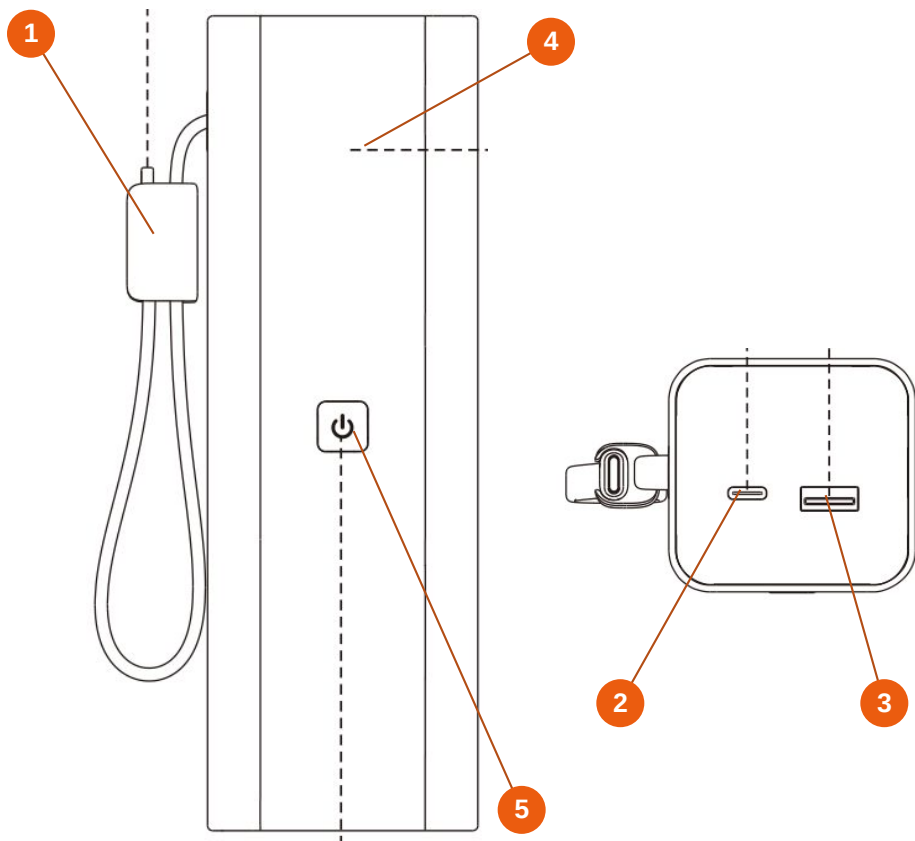

- 1. Built-in USB-C cable (100 W input/output)
- 2. USB-C input/output port
- 3. USB-A output port
- 4. TFT display
- 5. Display activation button

4. Operation

Charging Your Devices

- Use the built-in USB-C cable (up to 140 W output), USB-C port, or USB-A port.
- The power bank automatically detects connected devices and begins charging.
- Press the display activation button to view the remaining battery percentage.

Charging the Power Bank

The built-in USB-C cable can also be used as an input to recharge the power bank. You may also recharge using the USB-C input port. The display indicates charging status and battery level.

5. Display Information

- Battery percentage
- Input wattage
- Output wattage
- Temperature status
- Battery health indicator
- Low-current charging mode

Display Modes



Red 0%-5%



Orange 10%-20%



Green 21%-100%

IN & OUT Display



Input only




IN + OUT (Bypass on)


Battery Temperature Status



Blue: low temperature



Green: normal temperature




Red: high temperature

Battery Cycle Count Indicator



Green: low cycle count



Blue: moderate cycle count



Orange: high cycle count

IN & OUT Display



USB-C1 IN



USB-C1 OUT




USB-C1 IN / USB-C2 OUT



USB-C1 + USB-C2 + USB-A
OUT

Low-Current Mode

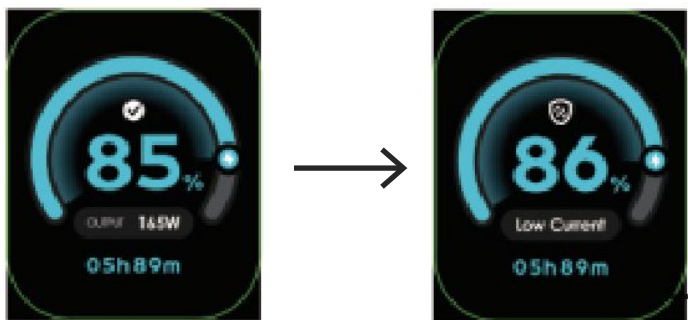

Press and hold the button for 2 seconds on the current interface.

6. Safety Information

- Use only with compatible devices.
- Do not expose to liquids or moisture.
- Avoid extreme heat or direct sunlight.
- Do not disassemble the product.
- Do not use if the product is damaged.
- Keep out of reach of children.

7. Safety Features

- Overcharge protection
- Overvoltage protection
- Short-circuit protection
- Overheating protection
- Overcurrent protection

8. Storage and Maintenance

- Store in a cool, dry place.
- Recharge periodically when not in use.
- Clean with a soft, dry cloth.
- Avoid dropping or exposing to heavy impacts.

9. Warranty

This product includes a limited 3-year warranty from the date of purchase. The warranty covers manufacturing defects under normal consumer use. Damage caused by misuse, accidents, or unauthorized modification is not covered. Proof of purchase may be required. For complete warranty details, visit www.reelcharge.com.

10. Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

11. California Proposition 65 Warning

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.reelcharge.com.

Visit www.reelcharge.com for more information.