

World Travel Adapter


100 W PD · 1 × USB-A + 3 × USB-C



User Manual

1007FVW

Product Overview

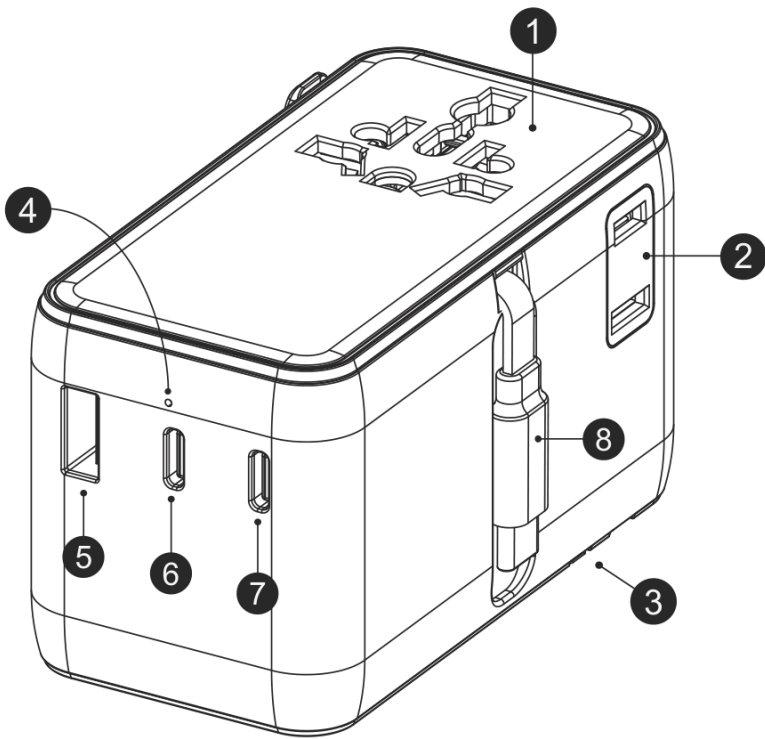

Product Overview

1. Multi-socket
2. USA/JP socket
3. USA/AU/UK/EU plugs
4. LED indicator
5. USB-A1 port
6. USB-C3 port
7. USB-C2 port
8. USB-C1 port

LED Indicator

Solid LED: Normal operation.

LED does not light: Possible overload. Unplug one device and check the indicator again.

Product Specifications

Model

1007FVW

Rating

100-250 V AC · 10 A max · 2500 W max

Input

100-250 V AC · 50/60 Hz · 2.5 A

Dimensions

95 × 59 × 54.5 mm

Total DC output

100.0 W

Supported protocols

PD3.0, QC4+, FCP, AFC, PPS, BC1-2 and more

Single-Port Output Mode

USB-C1

$5.0\text{ V} = 3.0\text{ A} \cdot 15.0\text{ W}$

$9.0\text{ V} = 3.0\text{ A} \cdot 27.0\text{ W}$

$12.0\text{ V} = 3.0\text{ A} \cdot 36.0\text{ W}$

$15.0\text{ V} = 3.0\text{ A} \cdot 45.0\text{ W}$

$20.0\text{ V} = 5.0\text{ A} \cdot 100.0\text{ W}$

USB-C2

$5.0\text{ V} = 3.0\text{ A} \cdot 15.0\text{ W}$

$9.0\text{ V} = 3.0\text{ A} \cdot 27.0\text{ W}$

$12.0\text{ V} = 3.0\text{ A} \cdot 36.0\text{ W}$

$15.0\text{ V} = 3.0\text{ A} \cdot 45.0\text{ W}$

$20.0\text{ V} = 5.0\text{ A} \cdot 100.0\text{ W}$

Single-Port Output Mode

USB-C3

$5.0\text{ V} = 3.0\text{ A} \cdot 15.0\text{ W}$

$9.0\text{ V} = 2.0\text{ A} \cdot 18.0\text{ W}$

$12.0\text{ V} = 1.5\text{ A} \cdot 18.0\text{ W}$

USB-A1

$5.0\text{ V} = 3.0\text{ A} \cdot 15.0\text{ W}$

$9.0\text{ V} = 2.0\text{ A} \cdot 18.0\text{ W}$

$12.0\text{ V} = 1.5\text{ A} \cdot 18.0\text{ W}$

Multi-Port Output Mode

C1 + C2

65.0 W + 35.0 W

C1 + C3/A1

65.0 W + 18.0 W

C2 + C3/A1

65.0 W + 18.0 W

C1 + C2 + C3/A1

65.0 W + 20.0 W + 18.0 W

C2 + C3 + A1

65.0 W + 15.0 W (C3 + A1)

C1 + C2 + C3 + A1

65.0 W + 20.0 W + 15.0 W (C3 + A1)

Accepted Plug Types

The adapter accepts Type A, B, C, D, E, F, G, H, I, J, L, N and O plugs.



Type A




Type B



Type C



Type D



Type E



Type F




Type G



Type H




Type I




Type J



Type L




Type N




Type O

Unsupported Plug Types

Type K and M plugs are not accepted.




Type K




Type M

Compatible Wall Outlets


The adapter can plug into Type A, B, C, D, E, F, G, H, I, J, K, L, N and O wall outlets.




Type A




Type B




Type C




Type D




Type E




Type F




Type G



Type H




Type I




Type J




Type K



Type L



Type N



Type O

2-Pole Unearthed Devices

Suitable for most electronic devices up to 2500 W at 250 V and 1000 W at 100 V. Examples are shown below.

Check the device's safety data sheet or rating plate before plugging it in.



Laptops



Small travel hair
dryers



Travel irons



Electric fans



Table lamps



Electric razors

USB Devices

Examples include cameras, smartphones, tablets, portable game consoles, Bluetooth speakers and power banks.



Cameras



Smartphones



Tablets



Portable game
consoles



Headsets




Power banks

How to Use the Adapter

Select the built-in multi-country plugs to fit outlets in different countries. The safety switch ensures that only one plug is energized.

1. Make sure the button resets when the plug is fully extended or retracted. If it does not reset, the plug is not in position and normal use is affected.
2. Only one plug type can be used at a time. Slide the selector to choose it; the other plug pins lock automatically.

Use USA Plug

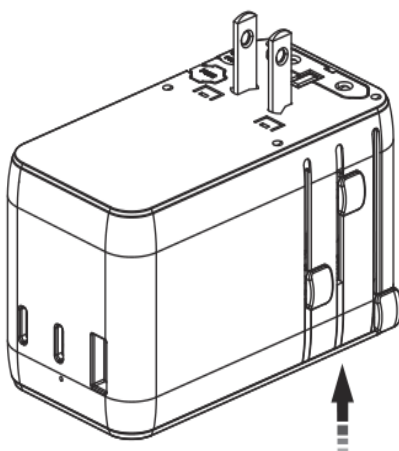


Lightly press the USA button and slide it fully down to extend the USA plug as shown.

Make sure the contact blades are turned to the parallel position.

To retract: Press and hold the USA button to release the plug. Pull it fully up, then release the button so it resets and locks the plug.

Use AUS Plug

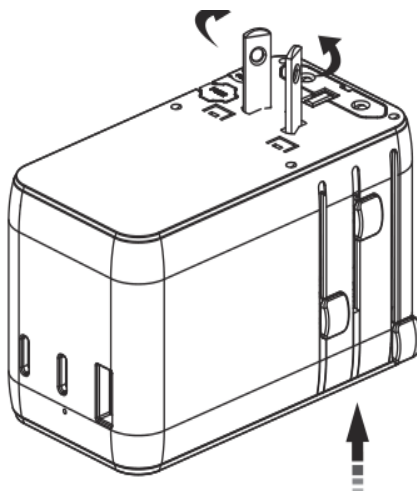


Lightly press the AUS button and slide it fully down to extend the AUS plug as shown.

Make sure the contact blades are turned to the parallel position.

To retract: Press and hold the AUS button to release the plug. Pull it fully up, then release the button so it resets and locks the plug.

Use UK Plug

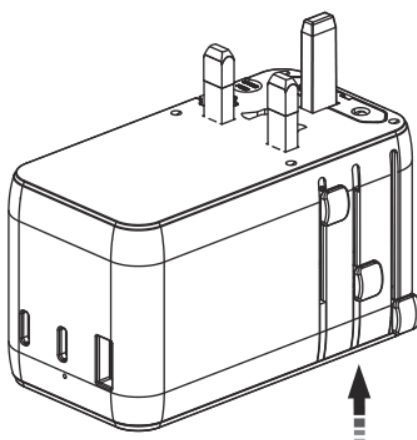


Lightly press the UK button and slide it fully down to extend the UK plug as shown.

Pull the insulated ground pin out of the housing.

To retract: Press and hold the UK button to release the plug. Pull it fully up, then release the button so it resets and locks the plug.

Use EU Plug

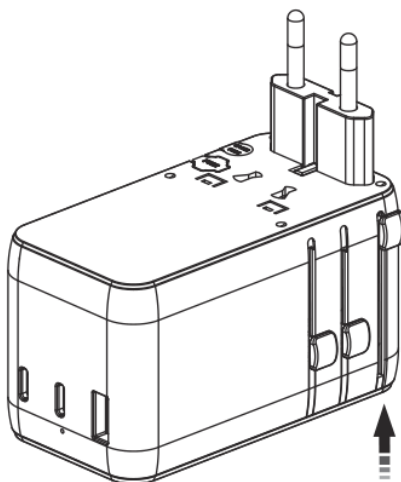


Lightly press the EU button and slide it fully down to extend the EU plug as shown.

Make sure the contact blades are turned to the parallel position.

To retract: Press and hold the EU button to release the plug. Pull it fully up, then release the button so it resets and locks the plug.

Fuse Replacement

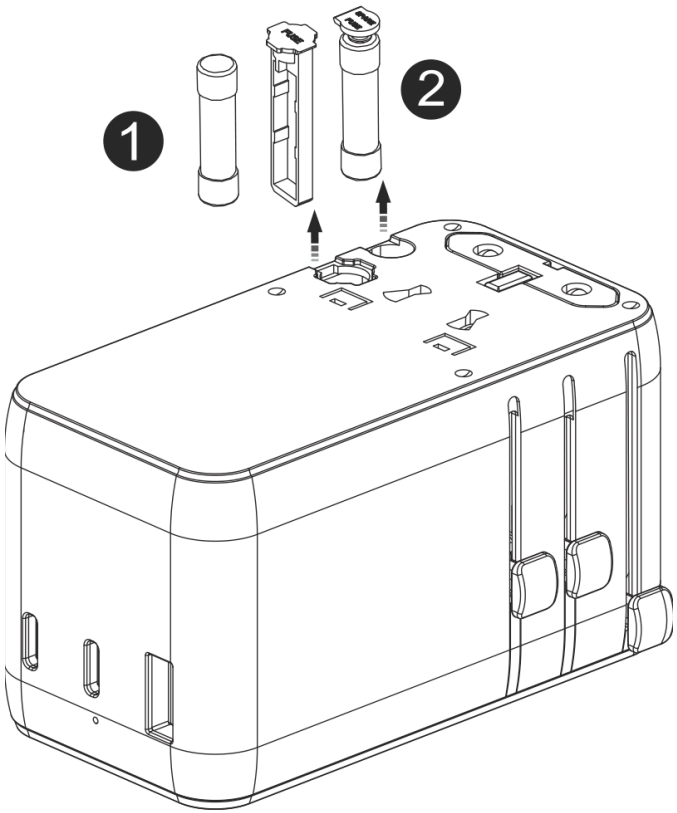

Fuse Replacement

1. Pull out fuse 1.
2. Pull out spare fuse 2 and put it into the original position of fuse 1. The adapter can then work again.
3. You can also fit a new fuse. Fuse standard: 250 V AC, 10 A, 6.3 × 25.4 mm.

Notes

1. Disconnect all devices before replacing the fuse.
2. Check whether water is leaking from the connected equipment and confirm its power rating.
3. Check whether the product is wet or water is leaking from it.

Caution

- Always unplug the adapter from the outlet when not in use.
- Read these instructions carefully before use.
- This product does not convert voltage (AC to AC). Before using it, confirm that the outlet voltage is suitable for your device to avoid damage or other safety hazards.
- For indoor use only.
- Misuse can cause electric shock.

Caution

- The USB cable must be shorter than 3 m.
- The travel adapter is for temporary use only, not permanent use.
- Do not plug one adapter into another adapter.
- No grounding. Use only with unearthed or double-insulated appliances.

Recycling



Do not dispose of waste electrical products with household waste.

Recycle where facilities are available.



Ask your local authority for recycling advice.



Compatible Countries · EU

Albania	Burkina Faso
Algeria	Burundi
Angola	Cameroon
Argentina	Canary Islands
Austria	Cape Verde
Azores	Central African Republic
Balearic Islands	Channel Islands
Bangladesh	Chile
Belgium	Comoros
Bolivia	Congo
Bosnia	Croatia
Brazil	Côte d'Ivoire
Bulgaria	

Compatible Countries · EU

Cyprus

Denmark

Djibouti

Egypt

El Salvador

Equatorial Guinea

Eritrea

Faroe Islands

Finland

France

Gabon

Germany

Gibraltar

Greece

Greenland

Guadeloupe

Guinea

Guinea-Bissau

Hungary

Iceland

India

Indonesia

Iran

Iraq

Israel

Compatible Countries · EU

Italy	Martinique
Kazakhstan	Mauritania
Korea	Mauritius
Kuwait	Monaco
Laos	Morocco
Lebanon	Mozambique
Lithuania	Myanmar
Luxembourg	Nepal
Macedonia	Netherlands
Madagascar	Niger
Madeira	Norway
Mali	Oman

Compatible Countries · EU

Pakistan	Sudan
Paraguay	Suriname
Peru	Sweden
Philippines	Switzerland
Poland	Syria
Portugal	Thailand
Romania	Togo
Russia	Tunisia
Rwanda	Turkey
Senegal	Uruguay
Somalia	Vietnam
Spain	Zambia

Compatible Countries · AUS

American Samoa	Nauru
Argentina	New Zealand
Australia	Panama
China	Papua New Guinea
El Salvador	St. Vincent
Fiji	Tajikistan
Guatemala	Tonga
Kiribati	Uruguay

Compatible Countries · USA

American Samoa	China
Anguilla	Colombia
Antilles	Costa Rica
Aruba	Cuba
Bahamas	Ecuador
Bangladesh	El Salvador
Barbados	Guam
Bermuda	Guatemala
Bolivia	Guyana
Brazil	Haiti
Cambodia	Honduras
Canada	Japan
Cayman Islands	Jamaica

Compatible Countries · USA

Laos	Philippines
Lebanon	Puerto Rico
Liberia	St. Vincent
Maldives	Saudi Arabia
Mexico	Tahiti
Micronesia	Taiwan
Montserrat	Thailand
Netherlands	United States
Nicaragua	Venezuela
Niger	Vietnam
Okinawa	Virgin Islands (U.S. and British)
Panama	Yemen
Peru	

Compatible Countries · UK

Bahrain

Bangladesh

Belize

Botswana

Brunei

Cameroon

Channel Islands

Cyprus

Dominica

El Salvador

Gambia

Ghana

Gibraltar

Grenada

Guatemala

Guyana

Hong Kong

Iraq

Ireland

Isle of Man

Jordan

Kuwait

Lebanon

Macau

Compatible Countries · UK

Malawi	Seychelles
Malaysia	Sierra Leone
Maldives	Singapore
Malta	Tanzania
Mauritius	Uganda
Myanmar	United Arab Emirates
Nigeria	United Kingdom
Oman	Vietnam
Qatar	Yemen
St. Lucia	Zambia
St. Vincent	Zimbabwe
Saudi Arabia	